

DS-KH6320-WTE1

Video Intercom Indoor Station w/7" Touch Screen



Hikvision's DS-KH6320-WTE1 Video Intercom Indoor Station features a 15.1 mm slim design and a colorful 7" capacitive touch screen.

The indoor station can be combined with other Hikvision products and used to set up security solutions with varying levels of sophistication.

Available Models:


DS-KH6320-WTE1

- New UI v2.0: User-Friendly Design
- 7" Colorful TFT Capacitive Touch Screen with 1024 x 600 Resolution
- Standard PoE
- Stores Messages and Captured Pictures on the SD Card
- Remote Unlocking via Client Software or Mobile Client
- Views Live Videos of Door Stations and External Cameras
- Supports Wireless Network

Specifications

DS-KH6320-WTE1	
System	
Memory	128 MB
Flash	32 MB
Operating System	Embedded Linux operating system
Display	
Display Screen	7-inch colorful TFT LCD
Display Resolution	1024 × 600
Operation Method	Capacitive touch screen
Audio	
Audio Input	Built-in omnidirectional microphone
Audio Output	Built-in loudspeaker
Audio Compression Standard	G.711 U
Audio Compression Rate	64 Kbps
Audio Quality	Noise suppression and echo cancellation
Network	
Wired Network	10/100 Mbps self-adaptive network
Wireless Network	Wi-Fi 802.11b/g/n
Network Protocol	TCP/IP, SIP, RTSP
Network Interface	1 RJ-45 10/100 Mbps self-adaptive
Alarm Input	8-ch alarm inputs
Relay Output	2
MicroSD Card	Maximum 32 GB, SD 2.0 or lower version
RS-485	1
General	
Power Supply	IEEE802.3af, standard PoE
	12 VDC/1 A
Power Consumption	≤6 W
Working Temperature	14° to 131° F (-10° to 55° C)
Working Humidity	10% to 90% non-condensing
Display Frame	Plastic
Dimensions (W × H × D)	7.9" × 5.5" × 0.6" (200 mm × 140 mm × 15.1 mm)

Typical Application

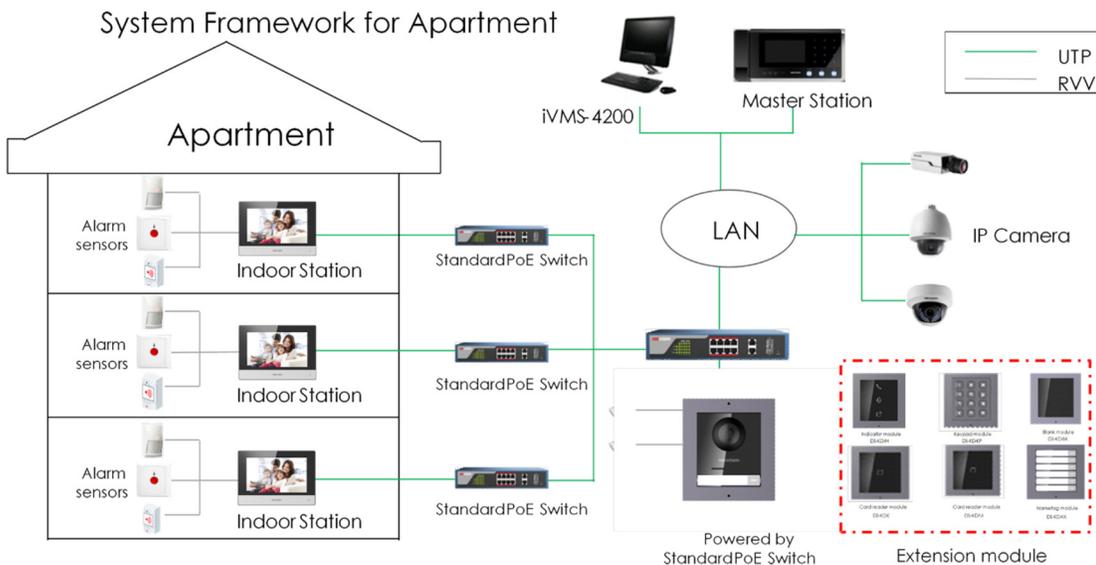

Accessories (not included)

