

## DS-KIS213 4-Wire HD Kit



- HD TVI video quality
- 7-inch LCD screen
- Plug & Play
- Water and dust resistant (IP65)

## ▪ Specification


<b>Door station</b>	
Supplement light	IR light, up to 3 m
Resolution	Stream resolution: 1280 x 720@60fps
FOV	Horizontal: 117°, Vertical: 70°, Diagonal: 141°
<b>Door station</b>	
Audio input	Built-in omnidirectional microphone (≤50 cm)
Audio output	Built-in loudspeaker (30 cm/76 dB, 50 cm/72 dB)
<b>Door station</b>	
Lock control	1 relay, max 30 V 1 A
Debugging port	1
Four-wire	1 four-wire interface
<b>Door station</b>	
Button	1 physical button(s)
Power supply	12 VDC
Power consumption	Max. 4 W
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10% to 90%
Dimensions	145 mm × 55 mm × 24 mm (5.71" × 2.17" × 0.94")
Application environment	Outdoor
Protective level	IP65, IK08
Installation	Surface mounting
Material	Metal
<b>Indoor station</b>	
Operation method	Physical button
Type	7-inch colorful TFT
Resolution	1024 x 600
<b>Indoor station</b>	
Audio input	Built-in omnidirectional microphone (≤50 cm)
Audio output	Built-in loudspeaker (30 cm/76 dB, 50 cm/72 dB)
<b>Indoor station</b>	
Linked indoor extensions capacity	2
Linked doorphone capacity	2
Linked analog camera	1
<b>Indoor station</b>	
Power supply input	12V DC
Debugging port	1
Four-Wire interface	4, 2 for indoor extensions, 2 for doorphones
DIP switch	1 Bit
BNC	1
<b>Indoor station</b>	
Button	4 physical buttons
Power supply	12 VDC
Power consumption	≤4 W

Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions (W × H × D)	178 mm x 132 mm x 19 mm (7.01" × 5.20" × 0.75")
Installation	Surface mounting
Application environment	Indoor

▪ **Available Model**


DS-KIS213

▪ **Dimension**

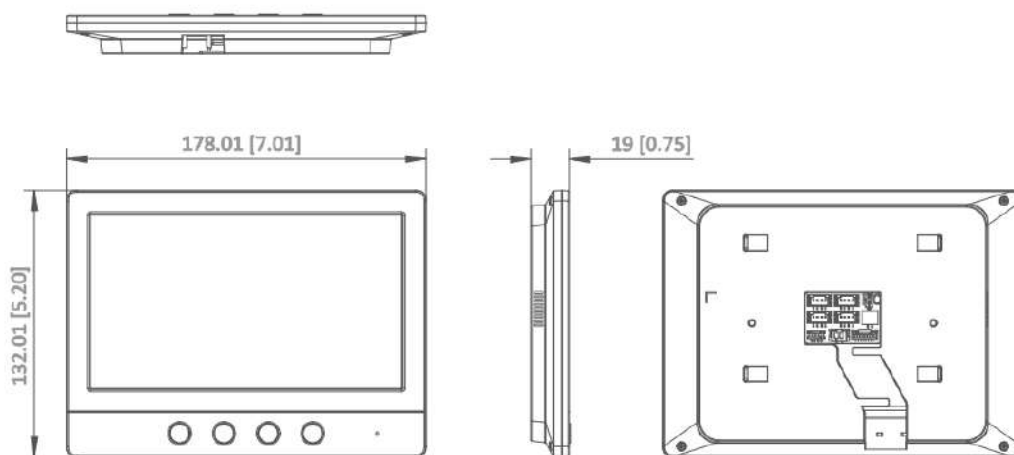

Unit:mm [inch]

SCALE 1:1

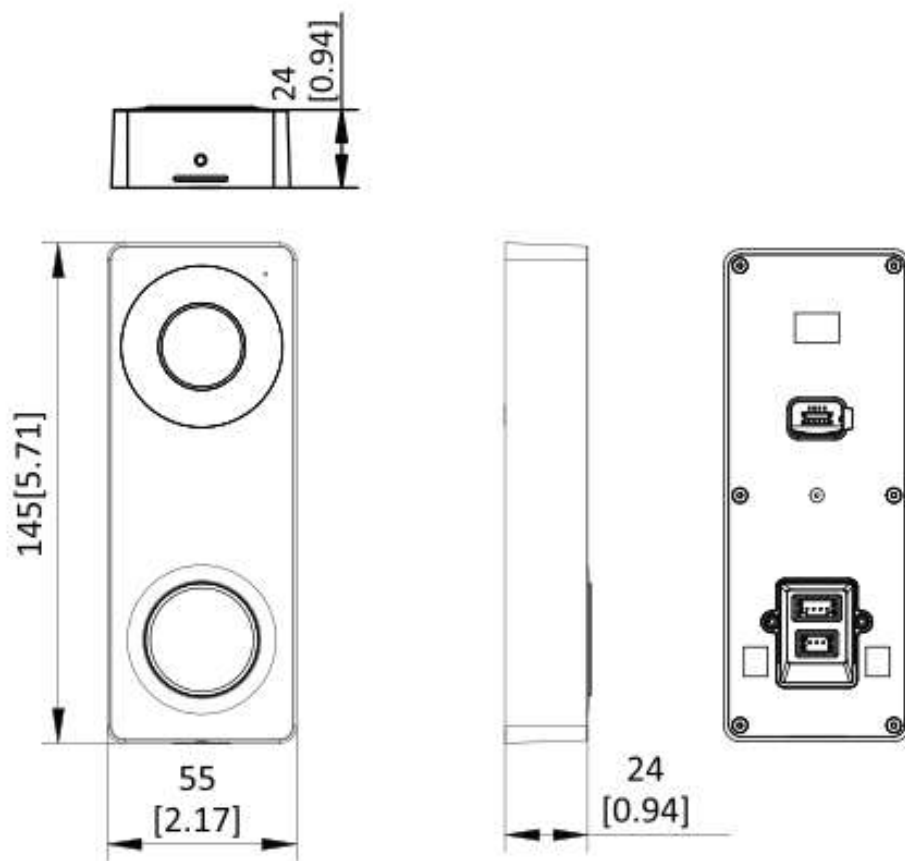

Unit:mm [inch]

- Accessory
- Optional

**DS-KABV6113-A**  
**Wall-mounted**  
**bracket of villa door**  
**station**



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

